

15 ASTM D 4869 TYPE I



“Authentic” Asphalt Saturated Organic Felt

A **GREEN** Roofing Product

GMC 15 D 4869 TYPE I FELT is an industry leading, superior quality “authentic” asphalt saturated organic felt underlayment. Manufactured to ASTM 4869 Type I specifications.

Certifications

ASTM D 4869 Type I

USES


GMC 15 D 4869 Type I authentic asphalt saturated organic felt underlayment is used as a **breathable** secondary weather resistant barrier when applied over the roof deck prior to the installation of the primary roofing product.

Features and Benefits

- **Required** **Note: (Approved underlayment is required to validate warranty on most all roofing systems.)**
- **Compatible** Recommended for use with roofing systems when ASTM D 226 is not required.
- **Easy to apply** No special fasteners required. (Note: Plastic cap nails help seal around nail holes.)
- **Cost effective** Convenient roll size, **400 sq. ft. coverage with salvage edge**, minimizes job loss and excessive waste.
- **Permeable** Breathable membrane to help prevent dry rot, mold and other structural damages.
- **Walk-able** Natural non skid surface ideal for steep slope roofing.
- **Durable** Manufactured for maximum performance.
- **Eco-friendly** **Organic** dry felt is made from **100% post consumer recycled material** and domestic asphalt from a local source. Note: (Leed points may be available)
- **USA Owned and Operated** Jobs for local residents, good for the economy. GMC is a proud supporter of several national and local charities.

Product Data

ECO-FRIENDLY COMPANY

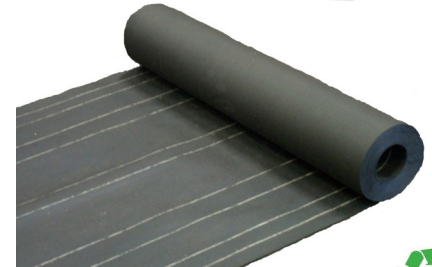

Manufactured with **Recycled** paper



Width: 39 3/8 Inches
Coverage: 432 Sq. Ft
Also available 324 Sq FT Roll
Packaging: 36 Rolls per pallet
36 Pallets per truckload



Manufactured by
GMC Roofing & Building Paper Products, INC.
6400 Zerkor Road, Shafter, CA. 93263
(661) 399 4324
www.gmcpaper.com