

# GMC PREMIUM ASTM D226

## Asphalt Saturated Organic Felt Underlayment



Manufactured in the USA

### GMC APPROVED CONTRACTOR


### 30 Year Extended Warranty Requirements

Quality installation is as important as quality products to maximize the performance of every roofing system. Therefore only GMC approved roofing contractors qualify for the GMC Extended Warranty. For details visit [www.gmcpaper.com](http://www.gmcpaper.com) or contact your local GMC Roofing and Building Papers representative. The following specifications are set as a minimum, subject to local building codes, as well as other minimum requirements and specifications.

For Tile Roofing Installation refer to TRI Manual Uniform ES ER2015. GMC recommends a minimum of ASTM D226 Premium Asphalt Saturated Felt for Tile Roofing Systems.

### GMC 30 Year Double Ply

1. Beginning course with half sheet fastened parallel to the eave, followed by a full width sheet. Maintain a minimum 12" end lap. GMC 22" Shake Felt is the ideal starter sheet for the double ply application.
2. Fasten underlayment to deck using an approved fastener, corrosive resistant roofing nail, properly applied to dry, clean and undamaged roof deck, **no staples**.
3. Adequate roof ventilation must be installed as required by local building codes and the primary roofing materials manufacturers recommendations.
4. Maximum exposure time 160 days prior to the application of the primary roofing material. Any tears or damage to the underlayment due to job site conditions and or extreme weather conditions must be repaired or replaced prior to the application of the primary roofing material.
5. Valley flashing to be used, minimum 22" felt in all valleys and special care be taken to properly flash all roof to wall transitions and chimney breaks to maintain proper water flow and prevent damming.

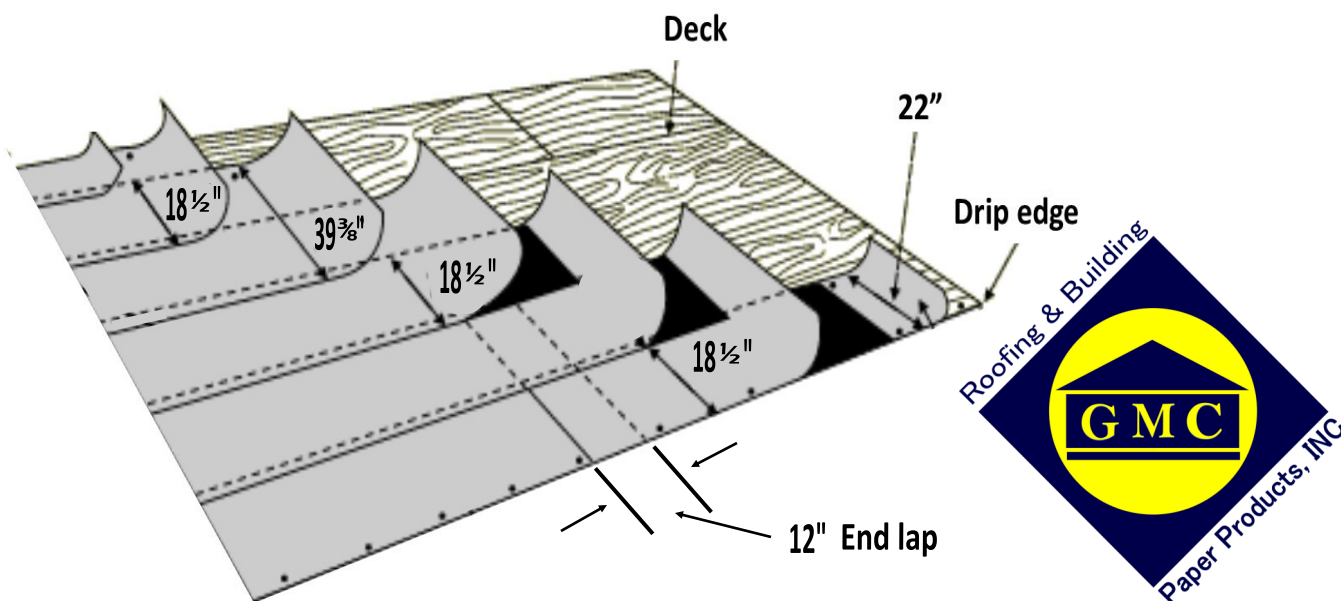

Manufactured by  
GMC Roofing & Building Paper Products, INC.  
6400 Zerker Road, Shafter, CA. 93263  
(661) 399 4324  
[www.gmcpaper.com](http://www.gmcpaper.com)